


RM21600 QUICK INSTALLATION GUIDE


CHENBRO
www.chenbro.com

Major Components

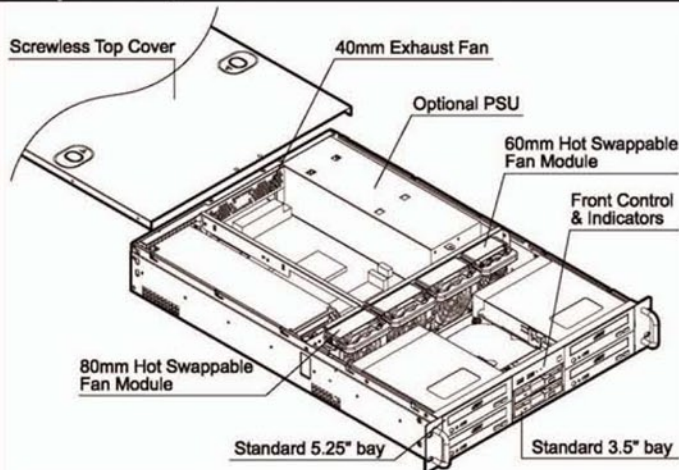


Front Panel Controls and Indicators


- A. USB 2.0 Port
- B. System Reset Button
- C. Alarm Mute Button
- D. System HDD Activity LED
- E. Power LED
- F. Alarm Notification LED
- G. LAN1 LED
- H. LAN2 LED
- I. Power Button

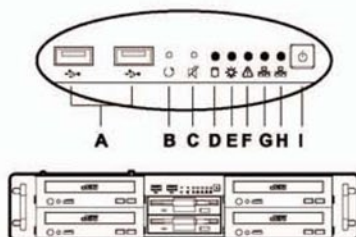

Rear Window Configuration

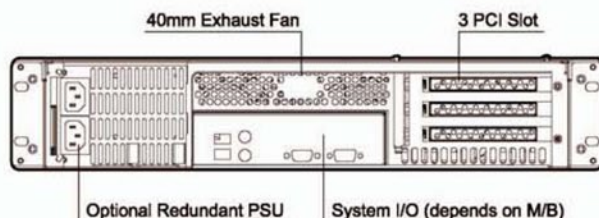


Top Cover Opening

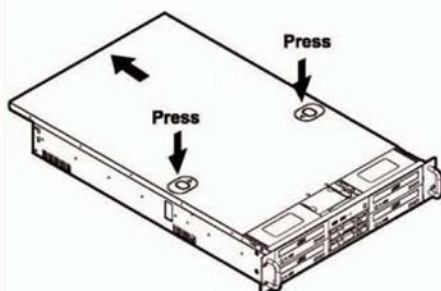

CAUTION


This unit must be operated with the chassis TOP COVER installed to ensure proper cooling

5.25" Front Cover Opening

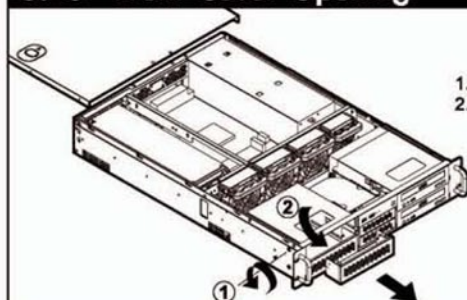


1. Release screw
2. Remove the front cover

Installing 5.25" Device

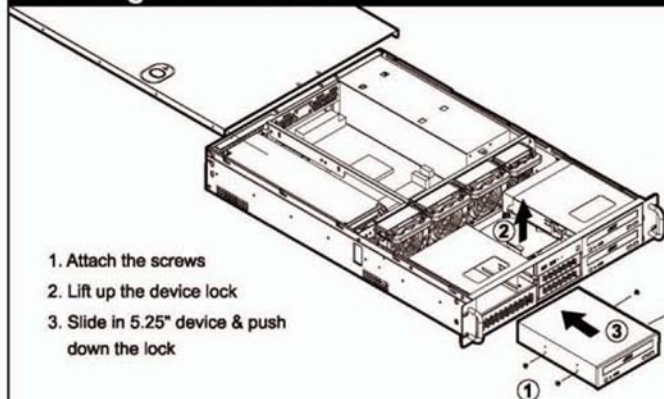


1. Attach the screws
2. Lift up the device lock
3. Slide in 5.25" device & push down the lock

Moving Hot Swappable Fan Module

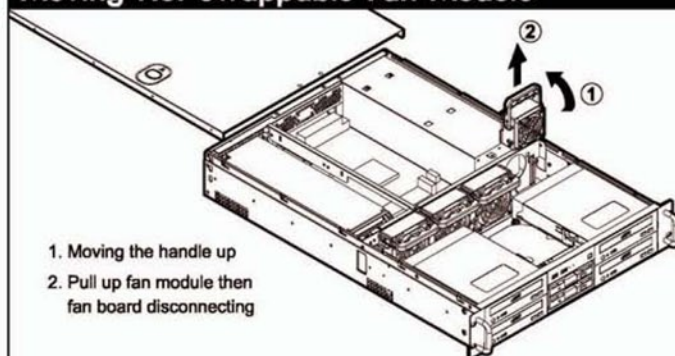


1. Moving the handle up
2. Pull up fan module then fan board disconnecting

Full Size PCI Card Installation (w/riser)

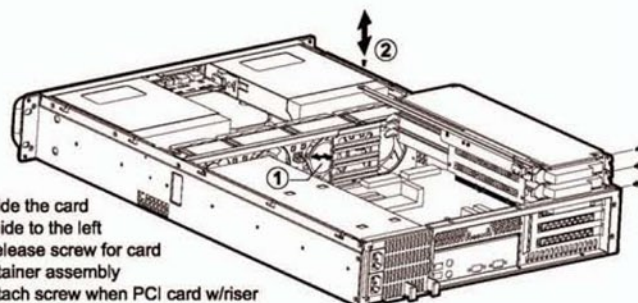

1. Slide the card guide to the left
2. Release screw for card retainer assembly
3. Attach screw when PCI card w/riser is installed
4. Slide the card guide to the right

3.5" Device Cage Installation

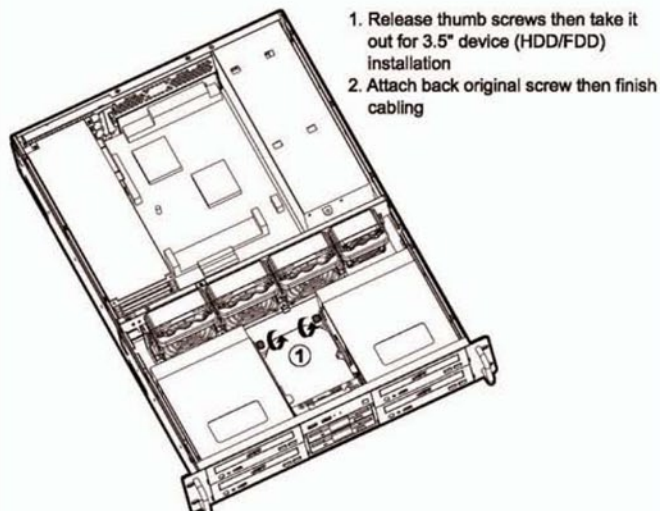

1. Release thumb screws then take it out for 3.5" device (HDD/FDD) installation
2. Attach back original screw then finish cabling